

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C,SMT H=7.50mm	MJ88-BX11-PRVS3

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	XSY	2014.1.7

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	XSY	2014.1.7








Table 1

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

Part No.:
MJ88-BX11-PRVS3

SPECIFICATION
 1.CURRENT RATING: 1.5AMPS
 2.VOLTAGE RATING: 125V AC
 3.INSULATION RESISTANCE: 500MΩ MIN.
 4.WITHSTAND VOLTAGE:
 AC1000V RMS 50Hz or 60Hz MIN.
 5.CONTACT RESISTANCE:40mΩ MAX.
 6.DURABILITY: 750 MATING CYCLES
 7.OPERATING TEMPERATURE: -25°C~+70°C

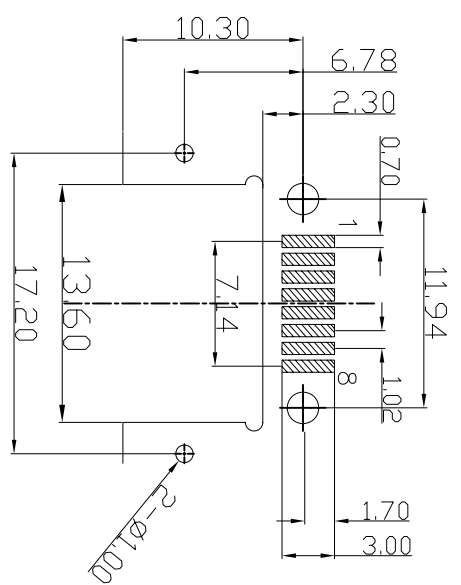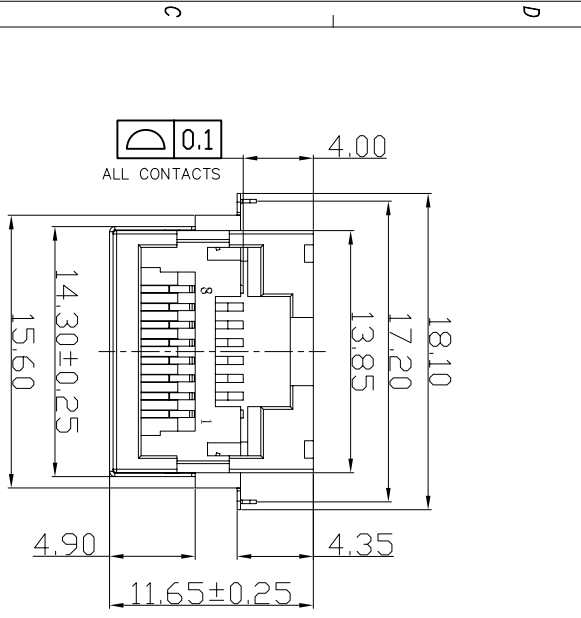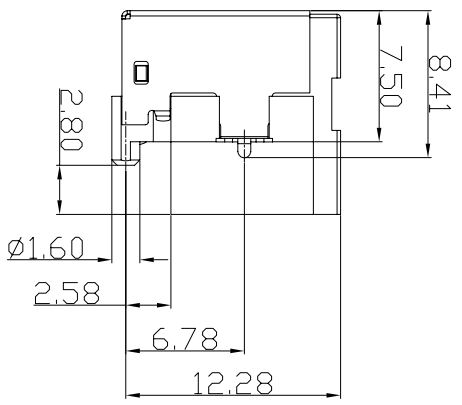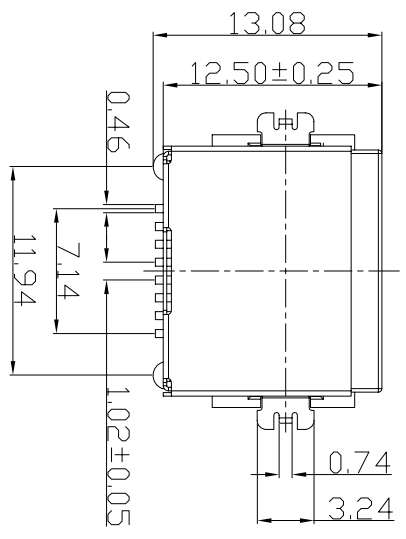

备注:
 1. 塑胶材料: LCP UL94-V0;
 2. 毛边最大0.05mm;
 3. 未注R角最大0.15mm;
 4. 端子: C5191-H T=0.30
 半金锡, 镍底50-80U", 锡100-120 "金普通U"
 包壳: 材质: C2680-H, T=0.20±0.01mm.
 镀镍30-50U" 电镀测试点不得低于30U"
 5. 标有⊕为FAT尺寸, 标有∅为
 重点管控及首件检测尺寸.

Product Drawing
 DongGuan Heling Electronic Co.,LTD

SCALE:1/1	UNIT: mm	DWG.NO:
SIZE: A3	PAGE: 1 OF 1	REV:A01

C	SHELL	1	BRASS T=0.2mm	Tin PLATING	
b	TERMINAL	8	PHOSPHOR BRONZE	Au/Tin PLATING	
a	HOUSING	1	LCP+30%G.F UL94V-0	BLACK	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	DECIMALS:	ANGLES:
	X : ±0.5	X : ±2°
	XX : ±0.3	XX : ±1°
	XXX : ±0.2	

APPROVED BY	CHECKED BY	PREPARED BY
		XSY
CUSTOMER COPY		