





4	3	2	1
CATEGORY	DESCRIPTION	P/N #	
CONNECTOR	Modular Jack, 8P8C, R/A, With LED	MJ5688-BX14-RLX	

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	GMC	2016.09.01

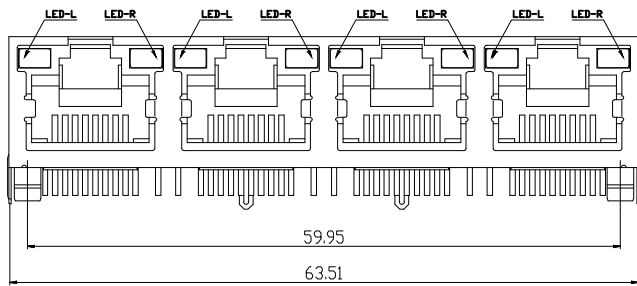

SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

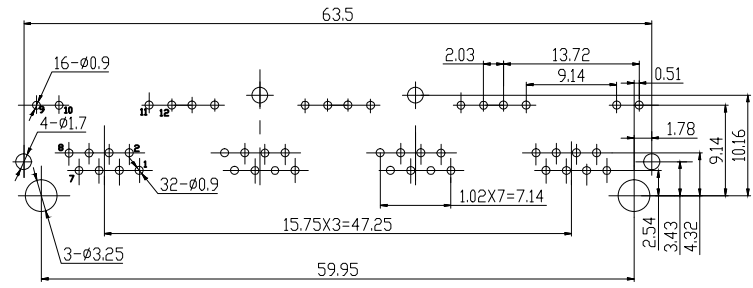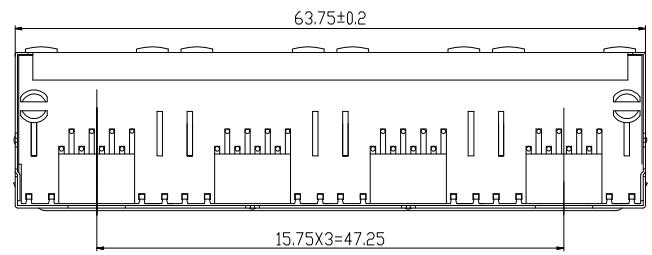


PC Board Layout

MJ5688-BX14-RLX


X	LED-L	LED-R
1	Green	Yellow
2	Yellow	Green

Table 1

X	Terminal Plating
0	G/F Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating



e	LED-R	4		See Color Scheme	
d	LED-L	4		See Color Scheme	
c	Shielding	1	Brass	Ni Plating	
b	Terminal	32	Phosphor Bronze	Au Plating	
a	Housing	1	PBT UL94V-0	Black	
NO.	PART NAME	Q'TY		MATERIAL	Material & Plating
					Remark


東莞市合陵電子有限公司
DongGuan HeLing Electronic Co.,LTD

Connector

SCALE:1/1	UNIT: mm	DWG.NO:
SIZE: A3	PAGE:1 OF 1	REV:A01
APPROVED BY	CHECKED BY	PREPARED BY
DICK	WZ	WZ

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2

ANGLES: X :±2°, X.X :±1°

CUSTOMER COPY